



O-Ring Cord

WESTERN POLYRUB INDIA PVT LTD

O-Ring Cord



O-Ring



Square Cut Ring



Quad Ring

| Materials | Temp. Range | | |
|----------------------|-------------|----|-------|
| Nitrile | -40°C | to | 120°C |
| Hydrogenated Nitrile | -40°C | to | 160°C |
| Viton™/Fluorocarbon | -26°C | to | 204°C |
| EPDM | -54°C | to | 150°C |
| Neoprene | -40°C | to | 121°C |
| Silicone | -65°C | to | 232°C |

| Cross - Sections (inches) | | |
|---------------------------|-------|-------|
| 0.063 | 0.250 | 0.625 |
| 0.093 | 0.275 | 0.687 |
| 0.103 | 0.312 | 0.750 |
| 0.125 | 0.375 | 0.872 |
| 0.139 | 0.437 | 1.000 |
| 0.188 | 0.500 | |
| 0.210 | 0.562 | |

Product Description

O-ring cord is excellent for large diameter static applications. Our O-ring cord is sold by the foot. Custom O-ring sizes can be manufactured through our in-house splice and vulcanizing service. For groove information refer to the O-ring section which begins on page 1.

Part Numbers:

| | | | | |
|----|---|---------------------|--------|------------------------|
| CO | - | _____ | _____ | _____ |
| | | C/S | | |
| N | - | Nitrile/Neoprene | NEO | - Neoprene |
| V | - | Viton™/Fluorocarbon | F BR | - Hydrogenated Nitrile |
| S | - | Silicone | SPONGE | - Sponge Material |
| E | - | EPDM | S | - Square Cut |

Quad Cord


| | | | |
|-----|---|-------|-----------------------|
| COQ | - | _____ | _____ |
| | | C/S | |
| | | Blank | - Nitrile |
| | | V | - Viton™/Fluorocarbon |
| | | S | - Silicone |
| | | E | - EPDM |

Example: COV 139S - Square Viton™ Cord, 0.139" C/S


Example: COQ 500 - Quad Nitrile Cord, 0.500" C/S

O-Ring Cord

O-Ring Cord



O-Ring



Square Cut Ring


| Materials | Temp. Range |
|----------------------|----------------|
| Nitrile | -40°C to 120°C |
| Hydrogenated Nitrile | -40°C to 160°C |
| Viton™/Fluorocarbon | -26°C to 204°C |
| EPDM | -40°C to 150°C |
| Neoprene | -40°C to 121°C |
| Silicone | -65°C to 232°C |

| Cross- Sections (mm) | | |
|----------------------|------|--------|
| 1.00 | 3.50 | 7.00 |
| 1.50 | 4.00 | 8.00 |
| 1.60 | 4.50 | 8.40 |
| 2.00 | 5.00 | 9.00 |
| 2.40 | 5.50 | 10.00 |
| 2.50 | 5.70 | 10.50 |
| 3.00 | 6.00 | >10.50 |

Product Description

O-ring cord is excellent for large diameter static applications. We sell O-ring cord by the foot. Custom O-ring sizes can be manufactured through our in-house splice and vulcanizing service.

Part Numbers:

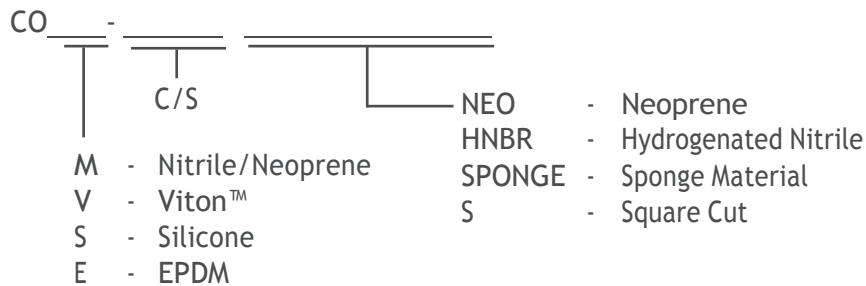

Example: COM 3S - Square Cut Nitrile Cord, 3.00 mm C/S